

TIMER

RS ANALOGUE TIMER



CHARACTERISTIC :

- Customized CMOS IC for low power consumption, high operation stability and extreme timing accuracy
- Flush mount with Type Y-40 adapter and surface mount without adapter

SPECIFICATION :


Operating voltage	AC(V): 24, 110, 220, 240, 380, 420
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.1S
Power consumption	Approx. 2VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85%RH
Weight	Approx. 160g

TYPE SELECTION :


Model	Variable	
Output contact	2C	1A1C
Type	RS-2	RS-3
Time range	6 min	6, 10 min

CONNECTION :

2C




1A1C




TIMING CHART :

2C

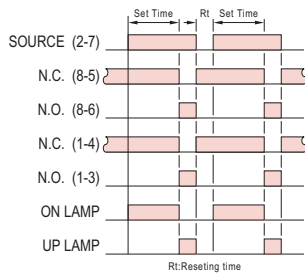


1A1C




DIMENSIONS : (mm)

N type(Surface Mounting): Using PF085A Socket & FH-3

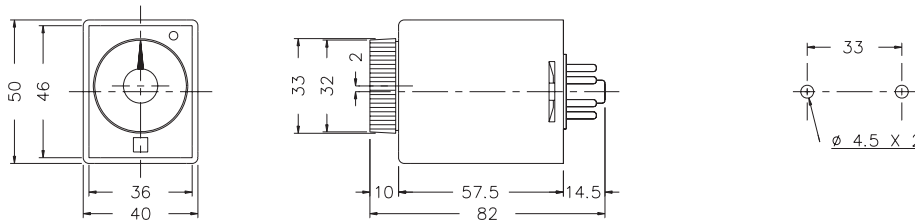

Y type(Flush Mounting): Using Y-40 Frame & US-08 Socket or P3G-08 Socket

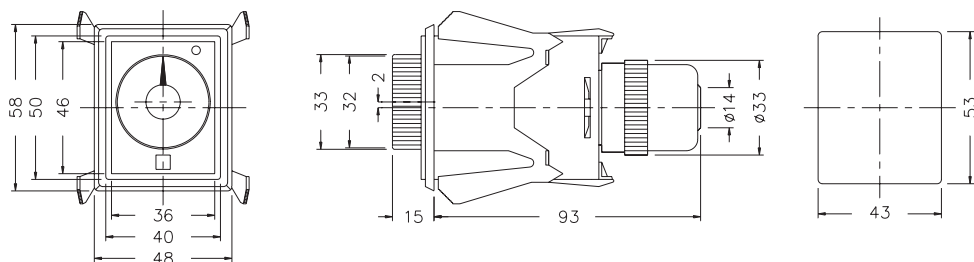

UPAC International CO., LTD.

TEL: +886-2-2250-3410
 FAX: +886-2-2250-5280
<http://www.upac.com.tw>
 E-mail: upac@seed.net.tw